

## UK4-20-12VDC-FRM-SS

1099782

The Ultra-Kool is a compact hydraulic reservoir, filter and cooler system. The frame isolation mounts make this perfect for severe applications.

Typical applications include:

Fertilizer Tenders  
Petroleum Trucks  
Seed Conveyors  
Feed Body Trailers  
Water Tanks




## FEATURES

- ✓ High Flow Integral 10 Micron Filter with 25 PSI Bypass
- ✓ Sight Level-Temperature Gauge
- ✓ 40 GPM Oil Cooler with 12VDC Electric Fan
- ✓ Stainless Steel Construction
- ✓ 2" NPT Suction Port
- ✓ #16 ORB Return Port
- ✓ 4 Gallon Reservoir

### PRODUCT & TECHNICAL SPECIFICATIONS

The **Inlet Temperature Difference** is the difference between the inlet oil temperature and the inlet air temperature in Fahrenheit. The smaller the difference is, the less ability the heat exchanger has to cool the oil.




#### MA Models - DC Fan Assemblies

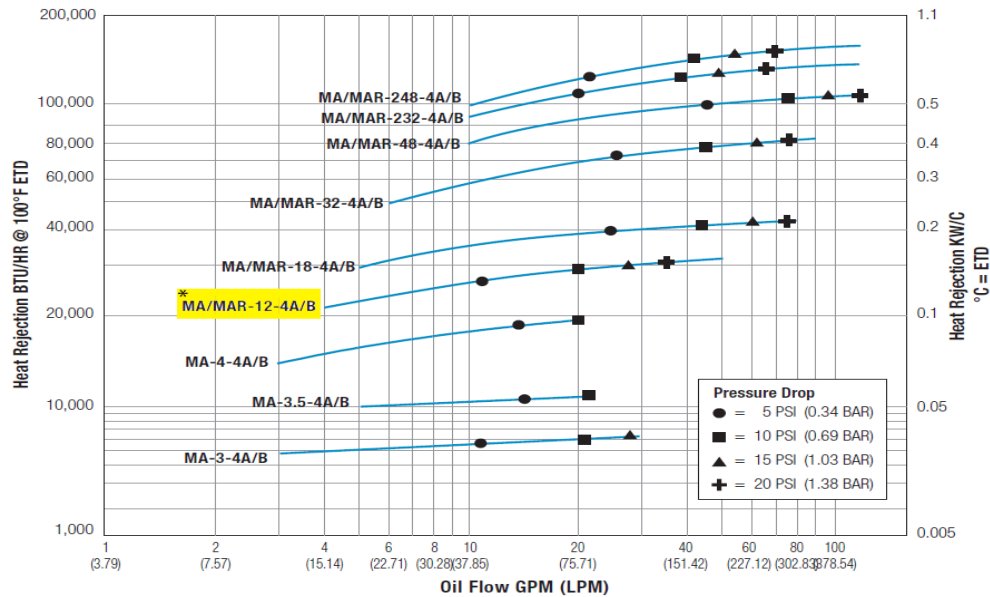


\* DC Fan Assembly Model Being Used

#### Model Number:

UK4-20 - 4 Gallon Reservoir - 12VDC Fan  
20 Gallons per minute of intermittent use  
Intermittent use is described as 20 minute intervals.

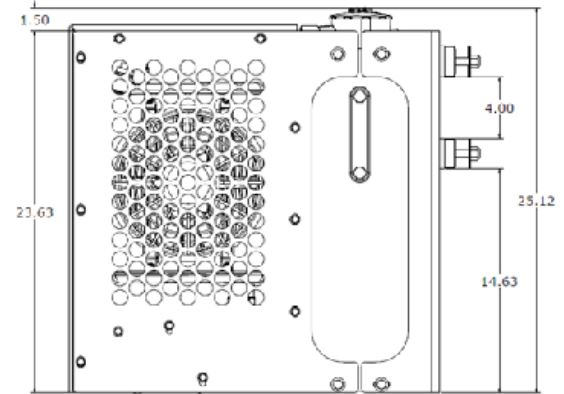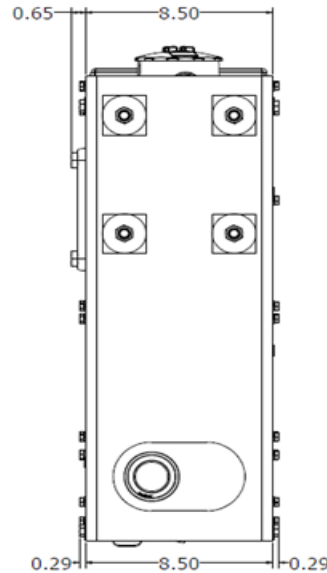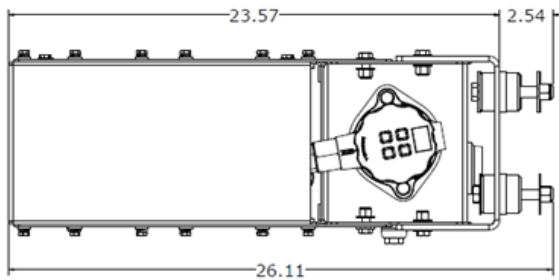

### Model Code Breakdown

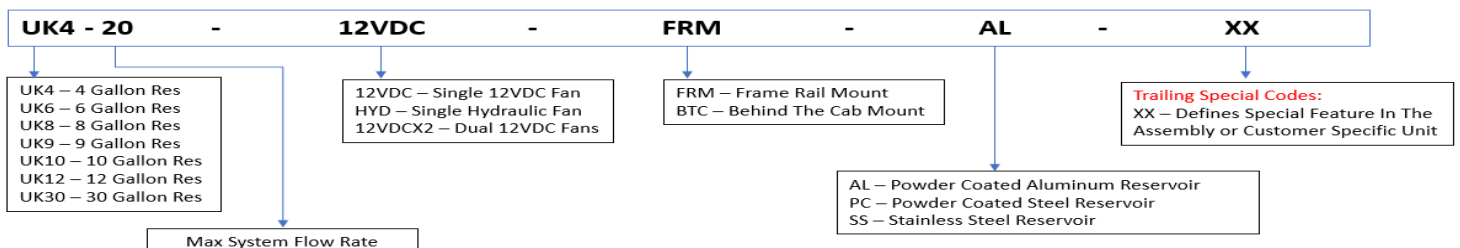

1212229