

ADD-A-LUBE™

The Add-A-Lube valve system allows you to quickly configure your Lube Trucks with a compact, high performance lubrication delivery system. Able to accommodate both load sense and open center circuits this solution also provides individual section electric on/off, flow control and pressure limiting capability to tailor to each lubricant circuit's needs.


FEATURES


- ✓ Inlet Flows Up to 30 GPM
- ✓ Inlet Operating Pressures to 3500 PSI
- Manifold Mounted Valve Sections and Pump/Motor Units
 - Unsurpassed serviceability of both valve sections and pump/motor units
 - Eliminates need to install and plumb separate control valve saving installation time and components
- ✓ Modular Sub-Base Design with Many Valve Options
 - Provides unlimited configuration with optional pressure limiting, flow control, proportional solenoids and optional manual overrides
 - Standard compensated sections ensures flow is shared between the circuits evenly
- Compact Space Saving Design Accommodating up to five Product Pumps
 - Minimizes the installation space required and reduces overall weight of assembly.



- Parker PGP511 Product Pump/Motor Combinations
 - ▶ High performance and high quality with dual shaft seals to prevent contamination between hydraulic system and product fluid
 - Multiple pump and motor sizes available including varying pump/motor size ratios for increased product pump delivery flows
- Optional 2-Way Valves Sections
 - Add additional valves sections to control remote auxiliary functions or additional product pumps
- Gear Pump or Load-Sensing Versions Available
 - Power Beyond optional with Gear Pump version
- ✓ Level Ports All Exit on the Bottom Side

INSTALLATION INFORMATION

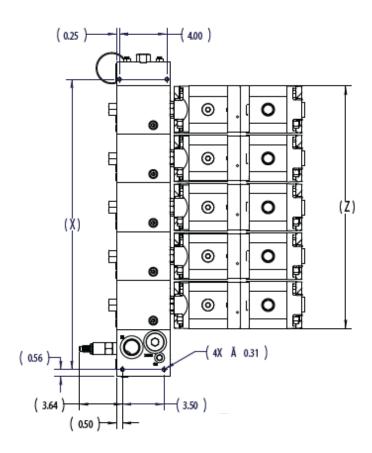

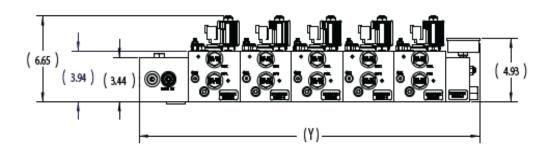

DIMENSIONS(in)	Х	Υ	Z
1-SECTION	8.01	10.88	4.00
2-SECTION	12.14	15.01	8.13
3-SECTION	16.27	19.14	12.26
4-SECTION	20.40	23.27	16.39
5-SECTION	24.53	27.40	20.52